


## Low intensity type A and B (L-810 FAA 150/5345-43H)




- ✦ ICAO low intensity type A & B, L-810 type red fixed
- ✦ Light part fully molded with 4 levels of leds
- ✦ Redundant circuits for LED's
- ✦ Surge protection included
- ✦ Bird spike
- ✦ 2 x 3/4"NPT threaded holes for mounting (or with the "NAVILITE-L810-HOLDER" and standard cable entry kit to be ordered separately in absence of FAA rigid conduit)
- ✦ monobloc design with no loose part during installation



Les dimensions sont en mm  
All dimensions are in mm



### Option with command box P/N 113912

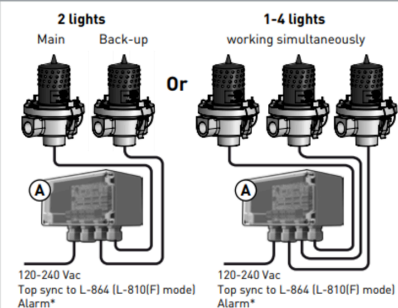

Electrical Characteristics	
Wattage	6 W
Life time	~10years
Main voltage	48VDC $\pm$ 10%
Mechanical Characteristics	
IP degree	IP65 in vertical position
Wiring	Terminal connection (2 power wires)
Operating temperature	-40/+55°C
Weight	1 kg
Wire cross section	from 1 to 2,5 mm <sup>2</sup>
Attachment	2 NPT threaded holes
Photometric Characteristics	
Luminous intensity	> 32,5 Cd
Color night time	Red
Vertical beam spread	>10°
Horizontal beam spread	360°
Standards	
Standards compliance	ICAO annex 14 chapter 6, FAA (AC 150/5345-43H), EASA, DGAC, CAA (CAP 168)