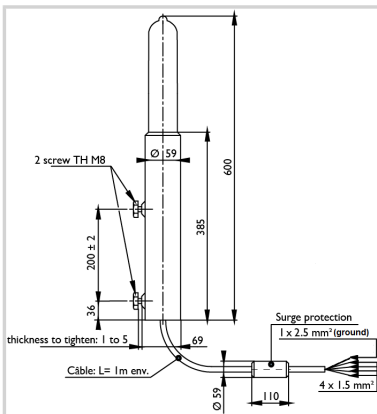


**Cold neon discharge low intensity type B**


- Perfectly waterproof with hard glass cover
- Not sensitive to temperature
- Great light efficiency
- Large vertical beam spread exceeding FAA and ICAO standard
- EMC re-enforced with grounding,
- Protected against transient overvoltages
- Alarm by closing relay in case of lamp failure or low power supply


**Electrical Characteristics**

Wattage	45 W
Current drawn	370mA(240V) - 730 mA(110V)
Life time	~10years
Main voltage	110VAC to 240VAC +/-10% 50/60Hz

**Mechanical Characteristics**

IP degree	IP66
Wiring	On 5 stripped wires (cable length 1 meter) (2 power wires 2x1,5mm <sup>2</sup> , 2 alarm wires 2x1,5mm <sup>2</sup> and 1 ground wire 2,5mm <sup>2</sup> )
Operating temperature	-40/+55°C
Weight	2,3 kg
Weight	2,3 kg
Size of the light	600mm (height) x 68mm (over diameter)
Attachment	2 screws type M8 (provided). Thickness to screw into : 1 up to 5 mm

**Photometric Characteristics**

Luminous intensity	> 32,5 Cd
Color night time	Red fixed
Vertical beam spread	>120°
Horizontal beam spread	360°

**Standards**

Standards compliance	ICAO annex 14 chapter 6, FAA AC 150/5345-43G
----------------------	--

