


## Cold neon discharge low intensity type B



- ✦ Perfectly waterproof with hard glass cover
- ✦ Not sensitive to temperature
- ✦ Great light efficiency
- ✦ Large vertical beam spread exceeding FAA and ICAO standard
- ✦ EMC re-enforced with grounding,
- ✦ Protected against transient overvoltages
- ✦ Alarm by closing relay in case of lamp failure or low power supply

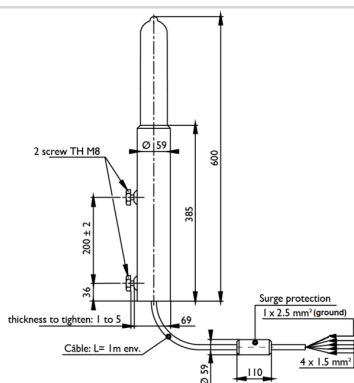

### Electrical Characteristics

Wattage	45 W
Current drawn	370mA(240V) - 730 mA(110V)
Life time	~10years
Main voltage	110VAC to 240VAC +/-10% 50/60Hz

### Mechanical Characteristics

IP degree	IP66
Wiring	On 5 stripped wires (cable lenght 1 meter) (2 power wires 2x1,5mm², 2 alarm wires 2x1,5mm² and 1 ground wire 2,5mm²)
Operating temperature	-40/+55°C
Weight	2.6 kg
Size of the light	600mm (height) x 68mm (over diameter)
Weight	2,3 kg
Attachment	2 screws type M8 (provided). Thikness to screw into : 1 up to 5 mm

### Photometric Characteristics

Luminous intensity	> 32,5 Cd
Color night time	Red fixed
Vertical beam spread	>120°
Horizontal beam spread	360°

### Standards

Standards compliance	ICAO annex 14 chapter 6, FAA AC 150/5345-43G
----------------------	--

NOTE:  
Washers and screws  
for wall fixation are  
not supplied.

