



***This OBSTAFLASH120 ou 180 dual color medium intensity type A and B (or C) is designed for day and night marking of obstacle such as chimneys, pylons and high rise buildings (3 or more lights are required per level depending on diameter of the obstacle)***

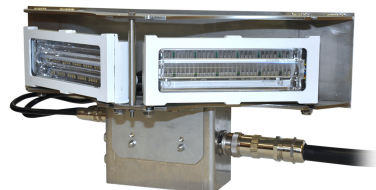

The flashhead includes

- 2 projectors in glass and aluminium painted with 75cm of molded cable and connector
  - a junction box OGP-JB-6P-RW-L for 6 projectors and the connector of the power supply cable 113762
- Patents: • Stainless support for the 2 projectors and the junction box

EP3230651, FR1462349, Pat. 10,247,386

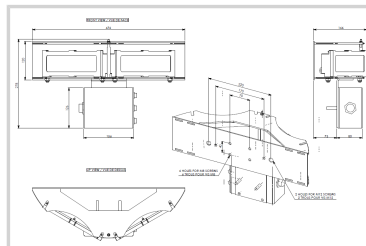

Mechanical Characteristics	
Wiring	Connectors L
Operating temperature	-40/+55°C
Weight	4.5 kg
Weight	4.5 kg
Size of the light	120mm (height) x 480mm (width)
Photometric Characteristics	
Effective light output day time at 0° on site	20 000cd (white)
Effective light output twilight mode at 0° on site	20 000cd (white)
Effective light output night mode at 0° on site	2000cd (red) with IR
Color day/twilight time	white
Color night time	Red or white
Vertical beam spread	>3°
Horizontal beam spread	360° with minimum 3 flashheads fixed at 120° around the obstacle
Standards	
Standards compliance	ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017)