


**12VDC command box for 2 NAVILITE-SOL P/N113903 in the configuration 'main and back-up'. This command box allows automatic switch from the main light to the back-up light in case of failure of the main light**



- Polycarbonate envelope • cable entries • 3 terminals connections (12V power supply, main lamp, back-up lamp)

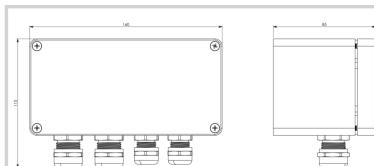

Electrical Characteristics	
Main voltage	12VDC (-10%; +15%)
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	0.23 kg
Cable entry diameter	6,5-12 mm & 4-10mm
Wire cross section	from 1 to 2,5 mm <sup>2</sup>
Attachment	4 screws type M4

- Conditions de mise en alarme :
- faible consommation de(s) lampe(s)
  - mise en court-circuit de(s) lampe(s)
  - manque d'alimentation
- Alarm conditions :
- low intensity of the lamp(s)
  - short-circuit of the lamp(s)
  - power supply failure