


Photocell for night only operation for all OBSTA 230Vac



- plug-in modular construction with plated contact surfaces
- automatic control of the red or dual obstruction lighting according to ambient light in compliance with FAA and ICAO twilight/night triggering level
- timer to prevent the functioning of the cell at inopportune times (lightning)

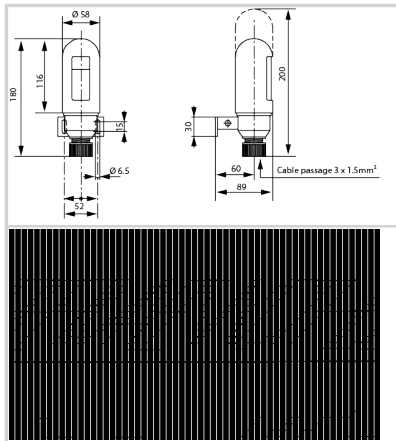

| Electrical Characteristics | |
|----------------------------|---|
| Main voltage | 230VAC +/-10% |
| Average wattage | 1.5VA |
| Max. admissible current | 10A contact closed in darkness |
| Mechanical Characteristics | |
| IP degree | IP67 |
| Wiring | by 3 screw terminals |
| Operating temperature | -25°C/+60°C |
| Weight | 300g |
| Wire cross section | up to 6mm ² |
| Attachment | by harness and screws |
| Standards | |
| Standards compliance | ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017) |