



OFP-CAB-12P-2E-R-240 [P/N: 113727N2]


110VAC to 240VAC stainless power cabinet for 2 obstafash
P/N113736 (or 12 red projectors)



Power supply

- ✦ 'Weather tight' stainless steel 316L power cabinet enclosure
- ✦ one luminous indicator per red circuit,
- ✦ maximum 36 red obsta projectors
- ✦ Test button for remote (photocell), day and night position
- ✦ Alarm dry contact NC and NO
- ✦ Master/slave configuration in case of multiple lights synchronisation through cable between the cabinets or wireless through GPS inside each cabinet
- ✦ Surge protection
- ✦ in option side lights L810 / low intensity type B for night only operation (or L810(F))

Les dimensions sont en mm
All dimensions are in mm

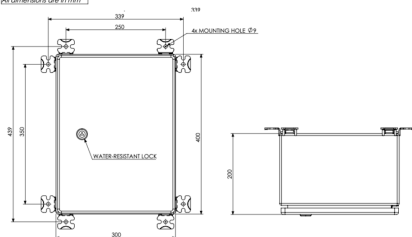

Electrical Characteristics

Main voltage	110VAC to 240VAC +/-10% 50/60Hz
--------------	---------------------------------

Mechanical Characteristics

IP degree	IP65 in vertical position
-----------	---------------------------

Operating temperature	-40/+55°C
-----------------------	-----------

Wire cross section	from 1 to 4 mm ²
--------------------	-----------------------------