


**48Vdc stainless power cabinet for one obstaflash P/N113736 (or 6 red projectors with junction box P/N113753)**



- 'Weather tight' stainless steel 316L power cabinet enclosure
- Luminous indicator for each pair of led circuit
- Test button for day and night
- Alarm dry contact "normally open" and "normally close" both available
- Master/slave configuration for synchronisation or through wireless GPS
- Surge protection included 30KA in 8/20us wave
- Possibility to connect side lights for night only operation

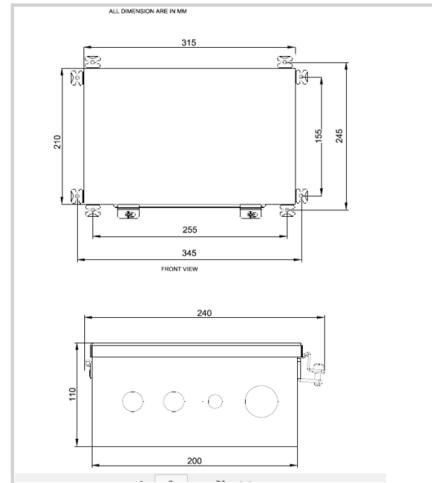

#### Electrical Characteristics

Main voltage	48VDC ± 10%
--------------	-------------

#### Mechanical Characteristics

IP degree	IP65 in vertical position
Operating temperature	-20/+45°C
Weight	10 kg
Size of the power supply	400mm (height) x 300mm (width) x 200mm (dept)
Wire cross section	from 1 to 4 mm <sup>2</sup>