


**Stainless control and battery cabinet to be used with OBSTAFLASH P /N113792U working during day time only with low intensity working during night time only**



- Stainless enclosure
- 4 batteries 12Ah 12Vdc
- Protection against deep discharge batteries
- Test button with 3 positions: 'remote', 'day', 'night' with interlock switch
- Surge protection on AC and DC sides
- Terminal connection for photocell, alarm, and low intensity 48vdc lights working at night only,
- alarm for lights, battery and charger

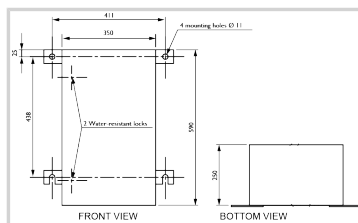

| Electrical Characteristics |  |
|----------------------------|--|
| Main voltage               | 230VAC +/-10%  |
| Mechanical Characteristics |  |
| IP degree                  | IP65 in vertical position  |
| Wiring                     | Entry of cable by glands nickel plated brass and connection by terminals |
| Operating temperature      | -20/+45°C  |
| Weight                     | 10 kg  |
| Size of the power supply   | 590mm (height) x 350mm (width) x 250mm (dept)                            |
| Wire cross section         | from 1 to 4 mm <sup>2</sup>  |