


Stainless control and battery cabinet to be used with OBSTAFLASH P /N113792U working during day time only with low intensity working during night time only



- Stainless enclosure
- 4 batteries 12Ah 12Vdc
- Protection against deep discharge batteries
- Test button with 3 positions: 'remote', 'day', 'night' with interlock switch
- Surge protection on AC and DC sides
- Terminal connection for photocell, alarm, and low intensity 48vdc lights working at night only,
- alarm for lights, battery and charger

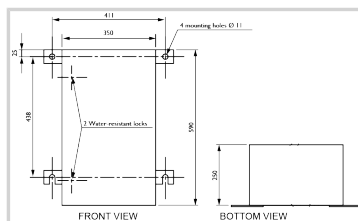

| Electrical Characteristics | |
|----------------------------|--|
| Main voltage | 230VAC +/-10% |
| Mechanical Characteristics | |
| IP degree | IP65 in vertical position |
| Wiring | Entry of cable by glands nickel plated brass and connection by terminals |
| Operating temperature | -20/+45°C |
| Weight | 10 kg |
| Size of the power supply | 590mm (height) x 350mm (width) x 250mm (dept) |
| Wire cross section | from 1 to 4 mm ² |