


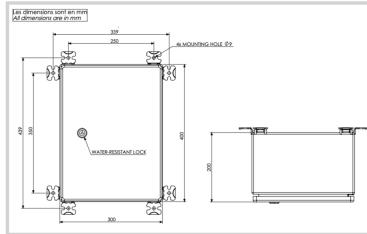

- stainless cabinet
- cable inputs by gland nickel plated brass
- up to 32 high intensity lights OFH series with one unique luminous indicator per light with a 5G control cable
- surge protection
- connexion of the photocell and the control cable
- remote/manual switch to bypass the photocell and force day/twilight/night mode


Electrical Characteristics

Main voltage	110VAC to 240VAC +/-10% 50/60Hz
--------------	---------------------------------

Mechanical Characteristics

IP degree	IP65 in vertical position
Weight	5 kg
Weight	5 kg
Size of the power supply	315mm (height) x 210mm (width) x 110mm (dept)
Cable entry diameter	from 8 to 15 mm
Wire cross section	from 1 to 4 mm ²
Attachment	4 screws type M5