


## Synchronisation interface using the GPS clock

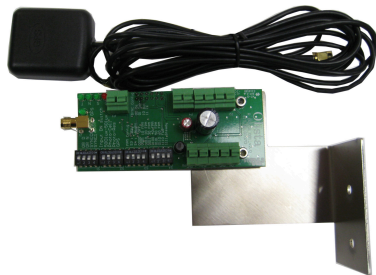

GPS interface using UTC clock UTC (00:00:00) for wireless synchronisation of flashing lights

- top sync for day time and for night time with day/night signal coming from external photocell or photocensor
- If used output signals for day/twilight/night mode as per civil twilight
- 4 luminous indicators
- provided with magnetic antenna

Electrical Characteristics	
Main voltage	24-48Vdc +/-10%
Mechanical Characteristics	
Weight	0.034 kg