



Double steady-burning light NAVILITE-F-120-240V should be installed when used as a top light in areas or locations where the failure of a single unit could cause an obstruction to be totally unlighted

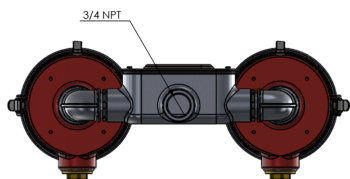

- 2 NAVILITE-F-120-240V P/N113969 and a bracket for the 2 lights P/N113928
- Surge protection included
- alarm normally close and normally open available on each light
- Vertical 3/4"NPT threaded holes for mounting the system
- No losing part during installation

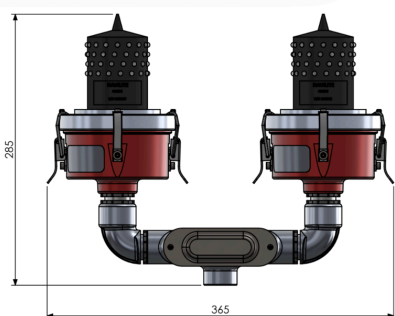

| Electrical Characteristics | |
|-----------------------------|---|
| Wattage | 12 W |
| Life time | ~10years |
| Main voltage | 110VAC to 240VAC +/-10% 50/60Hz |
| Mechanical Characteristics | |
| IP degree | IP65 in vertical position |
| Wiring | On 4 stripped wires (2 for each lamp) |
| Operating temperature | -40/+55°C |
| Weight | 3,1kg |
| Wire cross section | from 1 to 2,5 mm² |
| Attachment | vertical NPT threaded holes |
| Photometric Characteristics | |
| Luminous intensity | > 32,5 Cd |
| Color night time | Red fixed |
| Vertical beam spread | >10° |
| Horizontal beam spread | 360° |
| Standards | |
| Standards compliance | ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017) |
| Certification | FAA (AC 150/5345-43H) ETL verified |