


## Monitoring and control box



- ✦ stainless steel enclosure
- ✦ cable inputs by gland nickel plated brass
- ✦ 8 terminal connections for max 8 medium intensity lights and/or side lights red fixed or mimic with medium intensity red flashing
- ✦ individual alarms (normally closed and normally open both available) and visual indicator for each light (or group of light)
- ✦ surge protection
- ✦ connection of optional photocell
- ✦ alarm (normally closed and normally open both available) for the photocell and for the power supply
- ✦ on/off switch and remote/manual switch to bypass the photocell

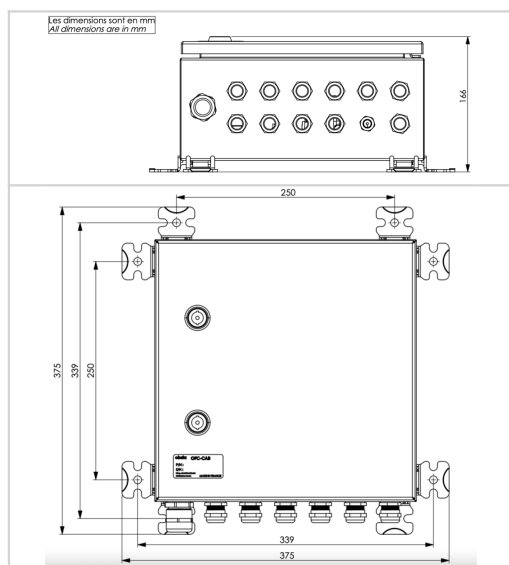

Electrical Characteristics	
Wattage	10W max (controller)
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Max. admissible current	10A
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	3,5kg
Weight	3,5kg
Size of the power supply	344mm (height) x 346mm (width) x 166mm (dept)
Cable entry diameter	from 7 to 13 mm
Wire cross section	up to 6mm <sup>2</sup> for power supply, up to 2,5mm <sup>2</sup> for signal
Attachment	4 screws type M5