


## Monitoring and control box



- cable inputs by gland nickel plated brass
- 8 terminal connections for max 8 medium intensity lights and/or side lights red fixed or mimic with medium intensity red flashing
- Individual alarm (normally closed and normally open both available) and visual indicator for each light (or group of light)
- surge protection
- connection of optional photocell
- alarm (normally closed and normally open both available) for the photocell and for the power supply
- on/off switch and remote/manual switch to bypass the photocell or GPS

### Option GPS (day/twilight/night sync and flash sync)

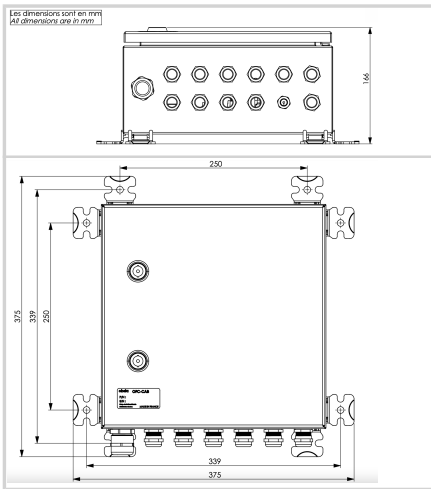

Electrical Characteristics	
Wattage	10W max (controller)
Main voltage	48VDC (-10%; +15%)
Max. admissible current	10A
Mechanical Characteristics	
IP degree	IP65 in vertical position
Weight	4.8 kg
Weight	4.8 kg
Size of the power supply	344mm (height) x 346mm (width) x 166mm (dept)
Cable entry diameter	from 7 to 13 mm
Wire cross section	up to 6mm <sup>2</sup> for power supply, up to 2,5mm <sup>2</sup> for signal
Attachment	4 screws type M5