



**Double steady-burning light NAVILITE-F-120-240V should be installed when used as a top light in areas or locations where the failure of a single unit could cause an obstruction to be totally unlighted**

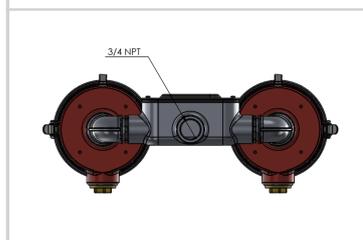

- 2 NAVILITE-F-48V (113965) and a bracket for the 2 lights P/N 113929
- Surge protection included
- ¾"NPT threaded holes for mounting the system
- No losing part during installation

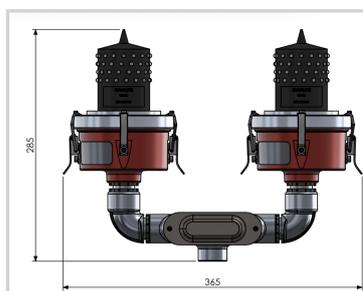

| Electrical Characteristics  |   |
|-----------------------------|---|
| Wattage                     | 12 W  |
| Life time                   | ~10years  |
| Main voltage                | 48VDC (-10%; +15%)  |
| Mechanical Characteristics  |   |
| IP degree                   | IP65 in vertical position   |
| Wiring                      | On 4 stripped wires (2 for each lamp)                                   |
| Operating temperature       | -40/+55°C   |
| Weight                      | 3kg   |
| Wire cross section          | from 1 to 2,5 mm <sup>2</sup>   |
| Attachment                  | vertical NPT threaded holes   |
| Photometric Characteristics |   |
| Luminous intensity          | > 32,5 Cd   |
| Color night time            | Red fixed   |
| Vertical beam spread        | >10°  |
| Horizontal beam spread      | 360°  |
| Standards                   |   |
| Standards compliance        | ICAO annexe 14 chapter 6 (8th edition 07/2018), EASA (4th edition 2017) |
| Certification               | FAA (AC 150/5345-43H) ETL verified                                      |