



OFP-CAB-1B-RW-240-8M16-S [P/N: 114113]

110VAC to 240VAC stainless power and control cabinet for OBSTA flash-head




Power supply

- ✦ 'Weather tight' stainless steel 316L power cabinet enclosure
- ✦ Multiple power supplies providing a high redundancy level
- ✦ Test button for day, twilight and night
- ✦ Alarm dry contact "normally open" and "normally close" activated in case 1 or 2 led projectors not operating
- ✦ Surge protection included
- ✦ Controlled by internal GPS or external controller (to be ordered separately)
- ✦ GPS as a back-up (both flash and day/twilight/night mode) in case of default of external signals

To be used with obsta medium intensity flash-head(s)

- ✦ drive up to 6 obsta dual color projectors (and 8 in white mode only) or up to 48 red projectors

Les dimensions sont en mm
All dimensions are in mm

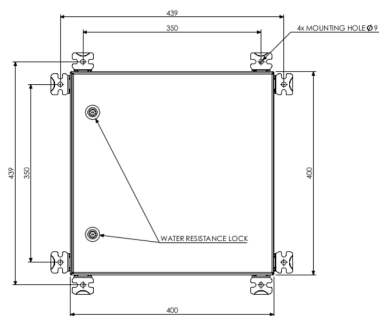

Electrical Characteristics

Main voltage 110VAC to 240VAC +/-10% 50/60Hz

Mechanical Characteristics

Weight 16 kg

Size of the power supply 590mm (height) x 350mm (width) x 250mm (dept)