


## Spare part for led lights



High intensity flash-head including:

- ✦ 6 led projectors with molded cable
- ✦ Each projector is made in aluminium painted and do have a hard glass enveloppe
- ✦ Each projector contains 2 white independent led circuits and a red/infrared led circuit (total 12 white led circuits and 2 red/infrared led circuits)
- ✦ Stainless support for the 6 projectors and optional junction box
- ✦ No losing parts and no special tools required to remove projectors
- ✦ Junction box and/or power unit to be ordered separately

Option length of cable : 2 meters

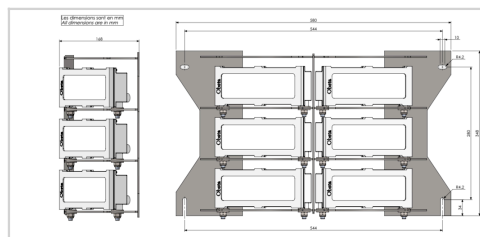

Mechanical Characteristics	
Wiring	On stripped wires
Operating temperature	-40/+55°C
Weight	14kg for flashhead
Photometric Characteristics	
Effective light output day time at 0° on site	200 000cd (white)
Effective light output twilight mode at 0° on site	20 000cd (white)
Effective light output night mode at 0° on site	2000cd (white)
Color day/twilight time	white
Color night time	White
Vertical beam spread	>3°
Horizontal beam spread	360° with minimum 3 flasheads fixed at 120° around the obstacle