OFI360-WW-240-U [P/N: 113723UI]

White medium intensity system FAA L-865 ETL certified



EP 1966535B1 & US 7816843


Flashhead


- 6 led projectors with 2 white led circuits
- Aluminium and glass enveloppe
- Simple installation with no losing parts when openning the flashhead
- Led drivers in stainless enclosure inside the flashhead with 2 stage surge protections

Power supply

Patents:

- 'Weather tight' stainless steel 316L power cabinet enclosure
- Test button with 3 positions: remote (photocell), day and night mode
- Alarm dry contact NC and NO
- External photocell
- Master/slave configuration in case of multiple lights synchronisation

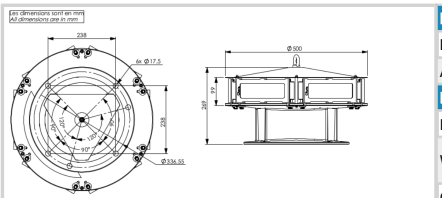

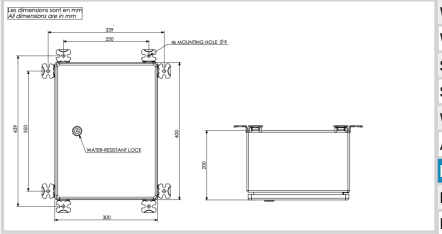

Electrical Characteristics	
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Average wattage	55W (day time), 8W (night mode)
Mechanical Characteristics	
IP degree	IP66 per projector
Wiring	Entry of cable by glands nickel plated brass and connection by terminals
Operating temperature	-40/+55°C
Weight	24 kg
Weight	24 kg
Size of the light	333mm (height) x 500mm (diameter)
Size of the power supply	400mm (height) x 300mm (width) x 200mm (dept)
Wire cross section	from 1 to 4 mm²
Attachment	6 mounting holes dia.16mm, dia.337mm circle (FAA standard)
Photometric Characteristics	
Effective light output day time at 0° on site	20 000cd (white)
Effective light output twilight mode at 0° on site	20 000cd (white)
Effective light output night mode at 0° on site	2000cd (white)
Color day/twilight time	white
Color night time	White
Vertical beam spread	>3°
Horizontal beam spread	360°
Flash per minute	40
Standards	
Standards compliance	ICAO annex 14 chapter 6, FAA (AC 150/5345-43J), UK MOD, Transport Canada
Certification	FAA (AC 150/5345-43J), ETL certified, DGAC(Fr)