

48V-NAV-CMD-120/240 [P/N: 113912]

Monitoring box allowing the control of NAVILITE 48VDC beacon(s), working at night only or continuously, plugged to work simultaneously (4 maximum) or in redundancy (a main light and a backup light working in case of failure of the main light) with remote signalization in case of failure of the light or he 230VAC supply.

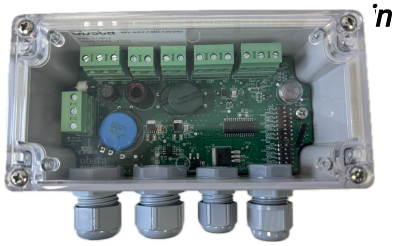

- Polycarbonate enveloppe with 4 cable entries
- Photocell integrated : 'day&night' or 'night only' operation
- Surge protection included
- alarm activated in case of failure of the power supply or failure of the lights
- 'main & back-up operation for 2-4 lights' or working simultaneously for 1 to 4 lights
- possibility to configure 1 to 4 NAVILITE 48VDC in fixed mode or flashing mode (low intensity type E, L-810(F))

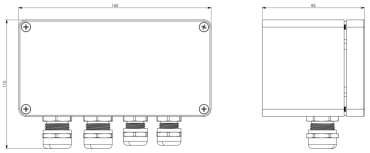

Conditions de mise en alarme :
– faible consommation de(s) lampe(s)
– mise en court–circuit de(s) lampe(s)
– manque d'alimentation

Alarm conditions :
– *low intensity of the lamp(s)*
– *short–circuit of the lamp(s)*
– *power supply failure*

Electrical Characteristics	
Wattage	24W
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP65 in vertical position
Dimensions	160 x 58 mm
Weight	300g
Cable entry diameter	6,5-12 mm & 4-10mm
Wire cross section	from 1 to 2,5 mm²
Attachment	4 screws type M4
Position of the 4 mounting holes	148 x 50 mm