
OFP-CAB-8P-4E-RW-240U [P/N: 113739-P8-4EU]

110VAC to 240VAC stainless power cabinet for 4 obstaflash dual color OFP-120-RW-JB-U



- 'Weather tight' stainless steel 316L power cabinet enclosure
- Luminous indicator for each pair of led circuit
- Test button for day and night
- Alarm dry contact "normally open" and "normally close" both available
- Master/slave configuration for synchronisation or through wireless GPS
- Surge protection included 30KA in 8/20us wave
- Possibility to connect side lights for night only operation

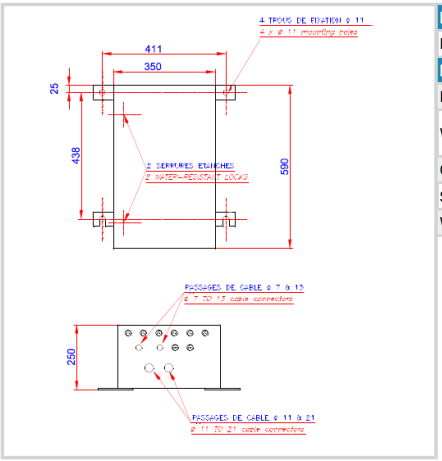

Electrical Characteristics	
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP65 in vertical position
Wiring	Entry of cable by glands nickel plated brass and connection by terminals
Operating temperature	-20/+45°C
Size of the power supply	590mm (height) x 350mm (width) x 250mm (dept)
Wire cross section	from 1 to 4 mm²