

HELITE-G-I-240 [P/N: 113975-I-240]

Touchdown and lift-off area lighting (TLOF)



- Housing powder-coated aluminium, RAL 1004 (aviation yellow)
- Diffuser – hardened glass
- Diffuser – flange nickel-plated ring
- Nickel-plated brass cable gland
- Stainless steel fasteners
- Light fixtures are provided with anti condensation valve and are UV protected

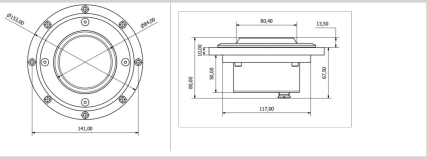

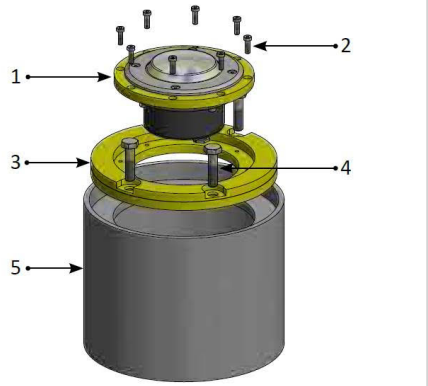

1. Light Fixture
2. M5*16 Allen Screw
3. Adapter Ring for 8″ Shallow Base
4. M10*20 Hexagonal Head Screw
5. Φ8″ IEC type Shallow Base

Electrical Characteristics	
Wattage	6 W
Main voltage	230VAC +/-10%
Mechanical Characteristics	
IP degree	IP 66
Operating temperature	-40/+55°C
Color	green
Weight	1,5 kg
Photometric Characteristics	
Luminous intensity	> 32cd
Standards	
Standards compliance	ICAO Annex 14, Volume II – Heliports and Volume 1