OFP-CAB-1B-RW-240-4M32-S [P/N: 114111]

110VAC to 240VAC stainless power and control cabinet for OBSTA flash-head




Power supply

- 'Weather tight' stainless steel 316L power cabinet enclosure
- Multiple power supplies providing a high redundancy level
- Test button for day, twilight and night
- Alarm dry contact "normally open" and "normally close" activated in case 1 or 2 led projectors not operating
- Surge protection included
- Controlled by internal GPS or external controller (to be ordered separately)
- GPS as a back-up (both flash and day/twilight/night mode) in case of default of external signals

To be used with obsta medium intensity flash-head(s)

- drive up to 6 obsta dual color projectors (and 8 in white mode only) or up to 48 red projectors

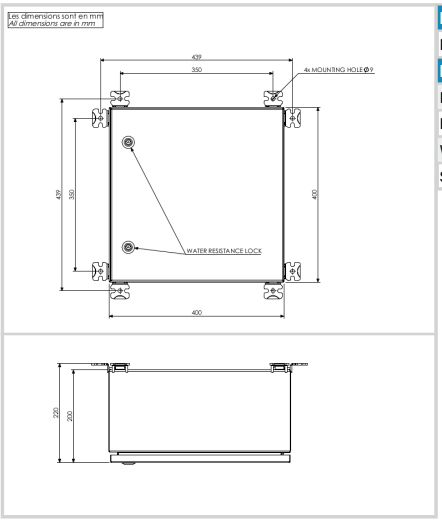

Electrical Characteristics	
Main voltage	110VAC to 240VAC +/-10% 50/60Hz
Mechanical Characteristics	
IP degree	IP 66
Housing material	316L stainless steel
Weight	16 kg
Size of the power supply	590mm (height) x 350mm (width) x 250mm (dept)