OBSTA-SERVER [P/N: 113785B]

Monitoring web interface of obstruction lighting systems for Obsta customers and administrators




This service includes :


- access to our secured web interface monitoring.taack.com
- one or more controller(s) OFH-CTR-CAN P/N 114803 connected to high intensity and/or dual color medium intensity obstruction lights
- one or more OBSTALINK(s) P/N114800 connected to medium intensity and/or low intensity obstruction lights

It allows to:

- Organize your sites, obstacles and lights centrally
- Overview of the status of the lamps monitored by the controllers
- Display a detailed lamp monitoring view with graphs of humidity, temperature, etc. (high and medium intensity only)
- Automatic creation and configuration of an obstacle and its lights when it is connected (high and medium intensity only)
- Storage of received telemetry data history
- setting of the of alarm thresholds

In option automatic email or SMS notification

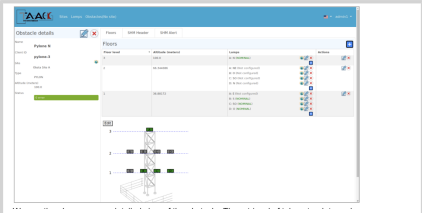

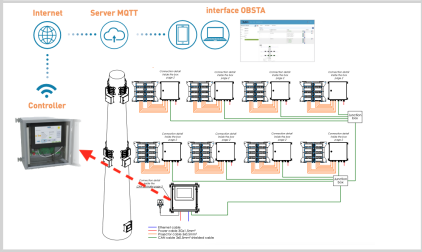

Mechanical Characteristics	
Housing material	RAL7032 Steel